



ChildhoodBuddy 15in1




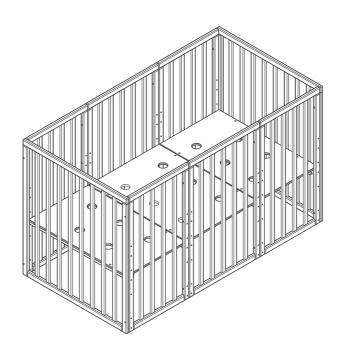









WARNING:

FAILURE TO FOLLOW THESE WARNINGS AND INSTRUCTONS COULD RESULT IN SERIOUS INJURY OR DEATH

Be aware of the risk of open fire and other sources of strong heat, such as electric bar fires, etc. in the near vicinity of the cot.

Do not use the cot if any part is broken, torn or missing and use only spare parts approved by the manufacturer.

Do not leave anything in the cot or place the cot close to another product, which can provide capture of arms or legs, clamping or suffocation, ex.: strings, blind/curtain cords, etc.

Do not use more than one mattress in the cot.

A cot is ready for use, only when the locking mechanism are engaged; check carefully that they are fully engaged before using the folding cot.

If the height of the cot is adjustable the lowest position is the safest and the base should always be used in that position as soon as the Baby is old enough to sit up.

When movable sides are provided, don't leave the child unattended in the cot; always make sure that movable side is closed.


Where detachable support rails are provided to suport the cot base above its lowest position it is essential to remove these rails before the cot is used in its lowest position.


Assembly drawing, a list and description of all parts and tools required for asembly and a diagram of the bolts and other fastenings required.


Thickness of the mattress shall be such that the internal height (surface of the mattress to the upper edge of the cot frame) is at least 500 mm in the lowest position of the cot base and at least 200 mm in the highest position of the cot base.


MAINTENANCE


- It's recommended to keep the furniture in a stable environment where the temperature is not less than 15 degrees C with the relative humidity in the 50-55% range, after assembly make sure that all screws are tight
- Every 6 months check all locking mechanisms, if necessary tighten loose screws; follow this rule to prevent the occurrence of squeaks
- In case of occurence of squeaks disassemble the cot and wipe the stabbing parts with a damp cloth and allow drying
- Then assemble the cot, change the position of the side panels
- Make sure all screws are tight

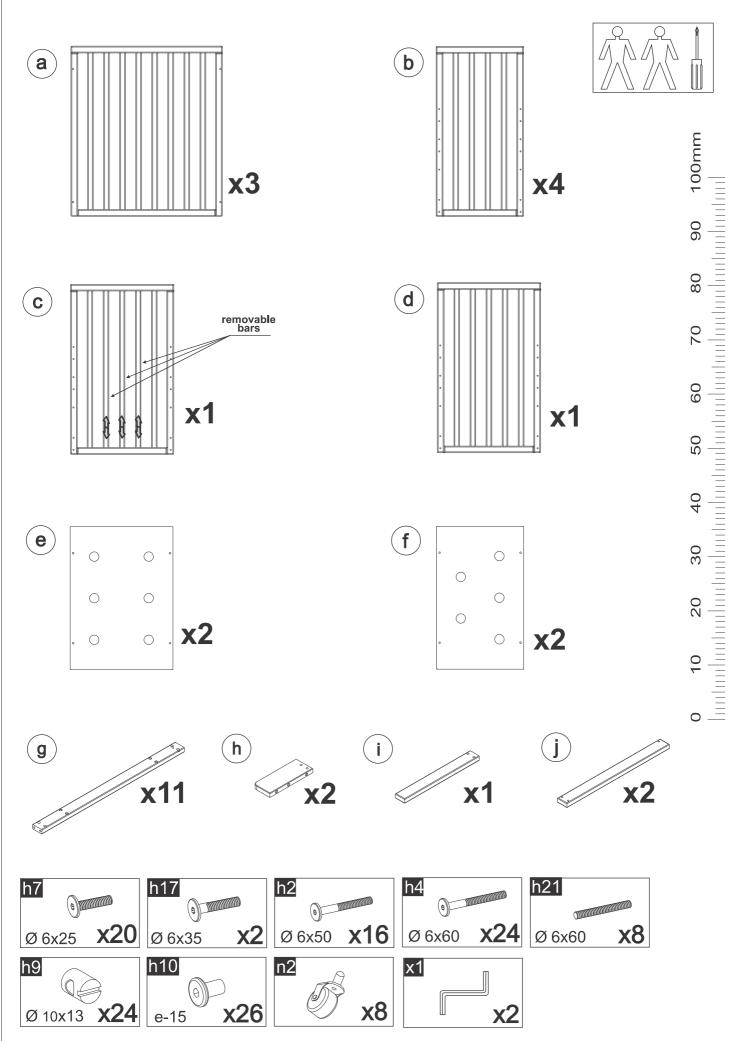


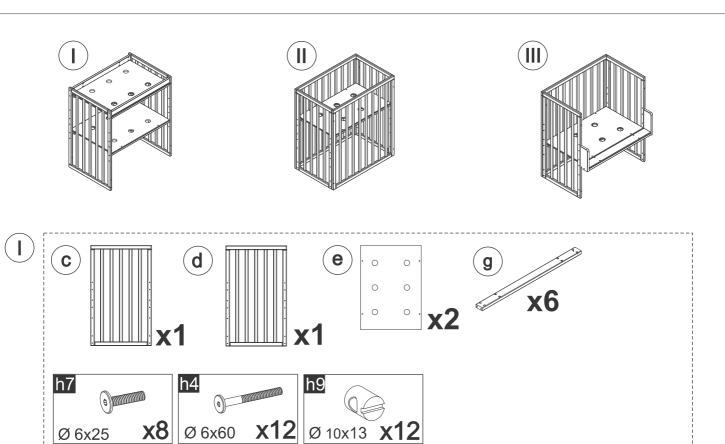


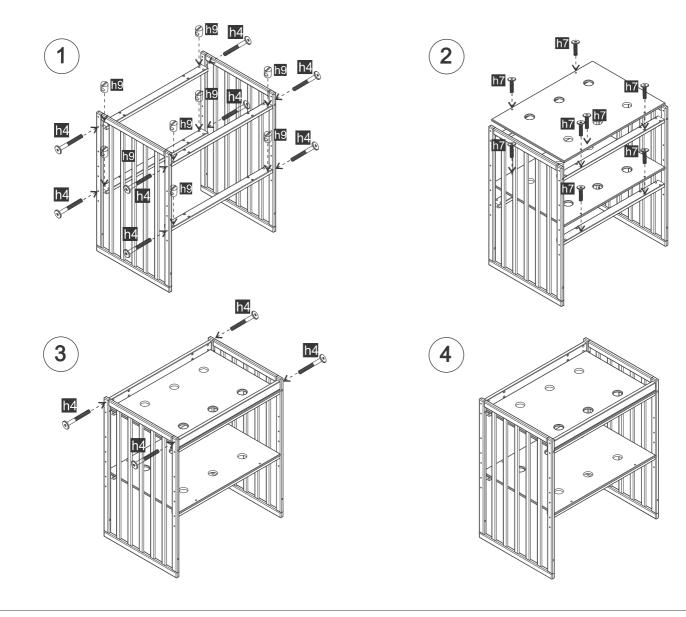


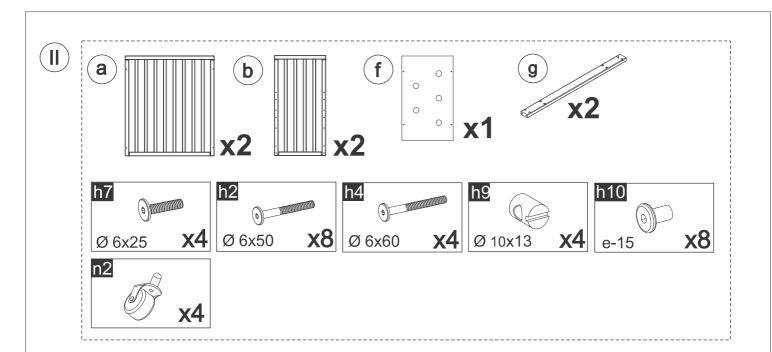













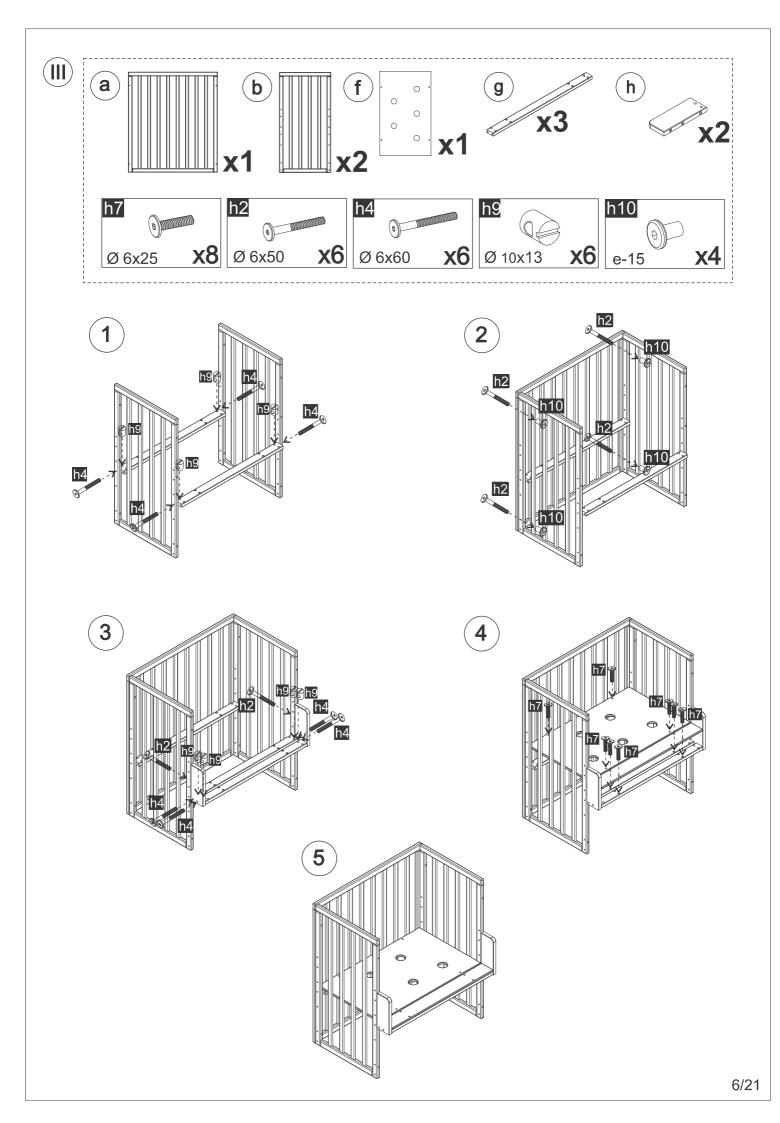








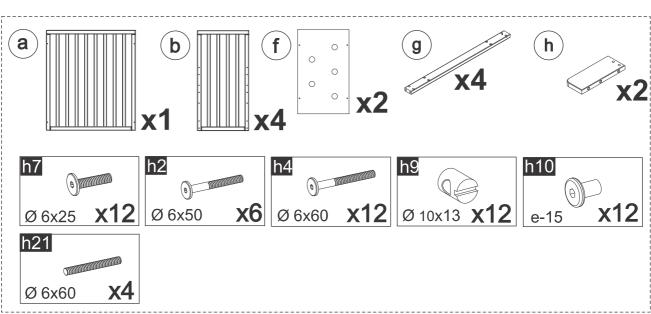


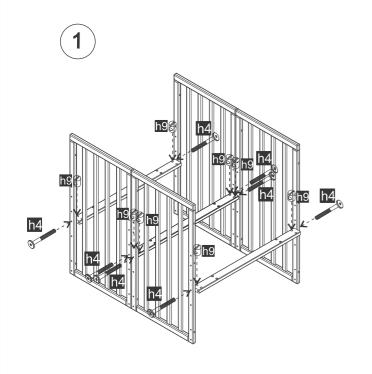


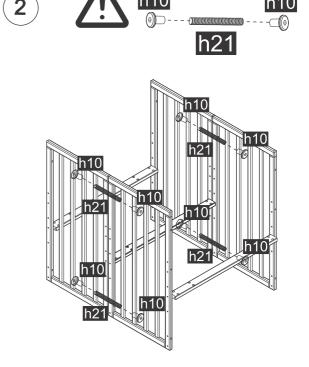

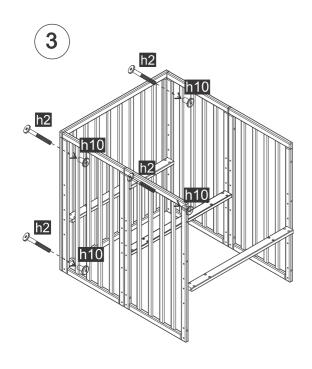





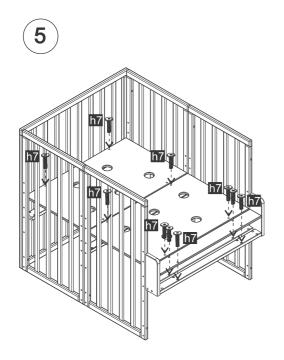


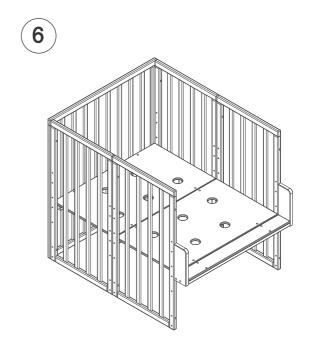








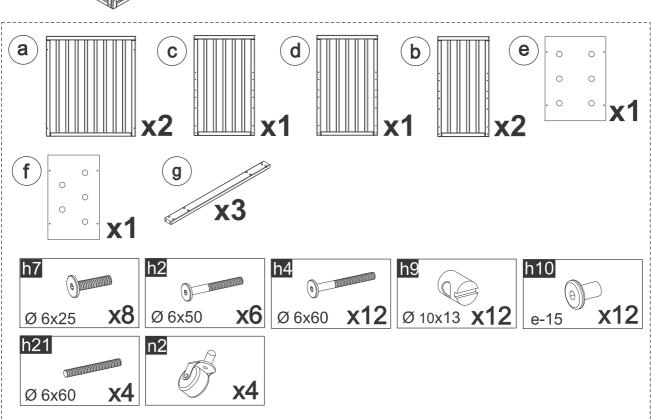


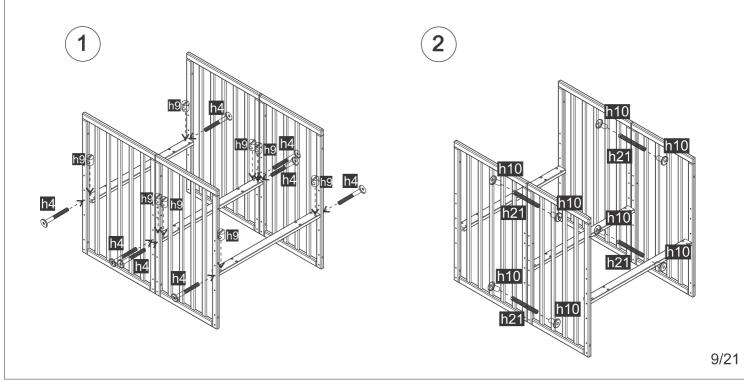


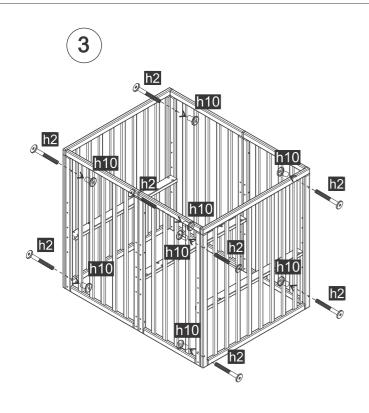


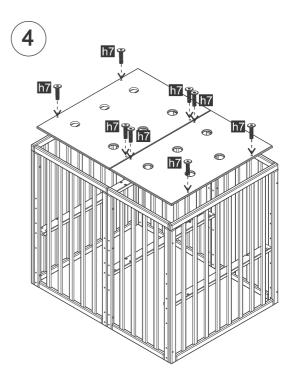


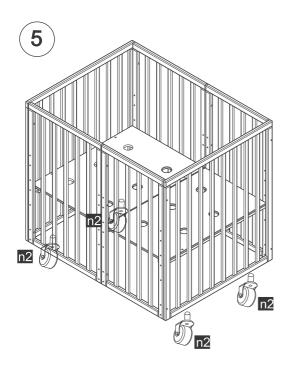





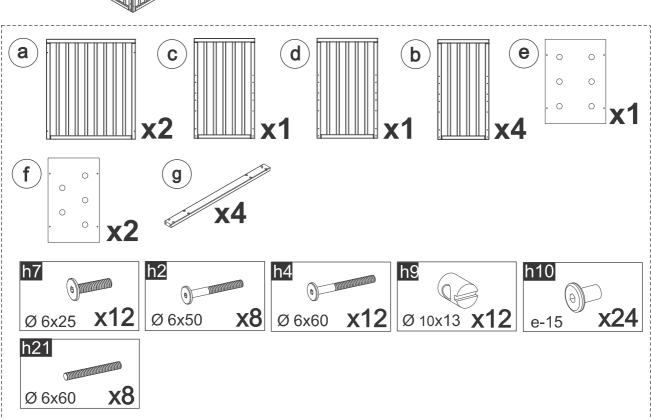


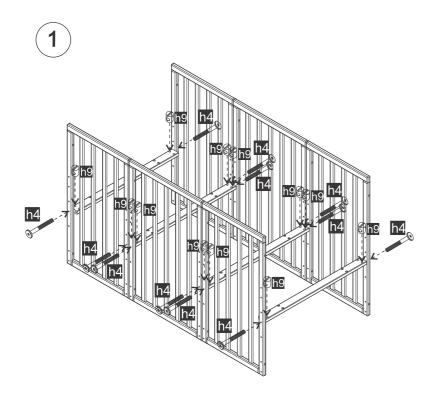


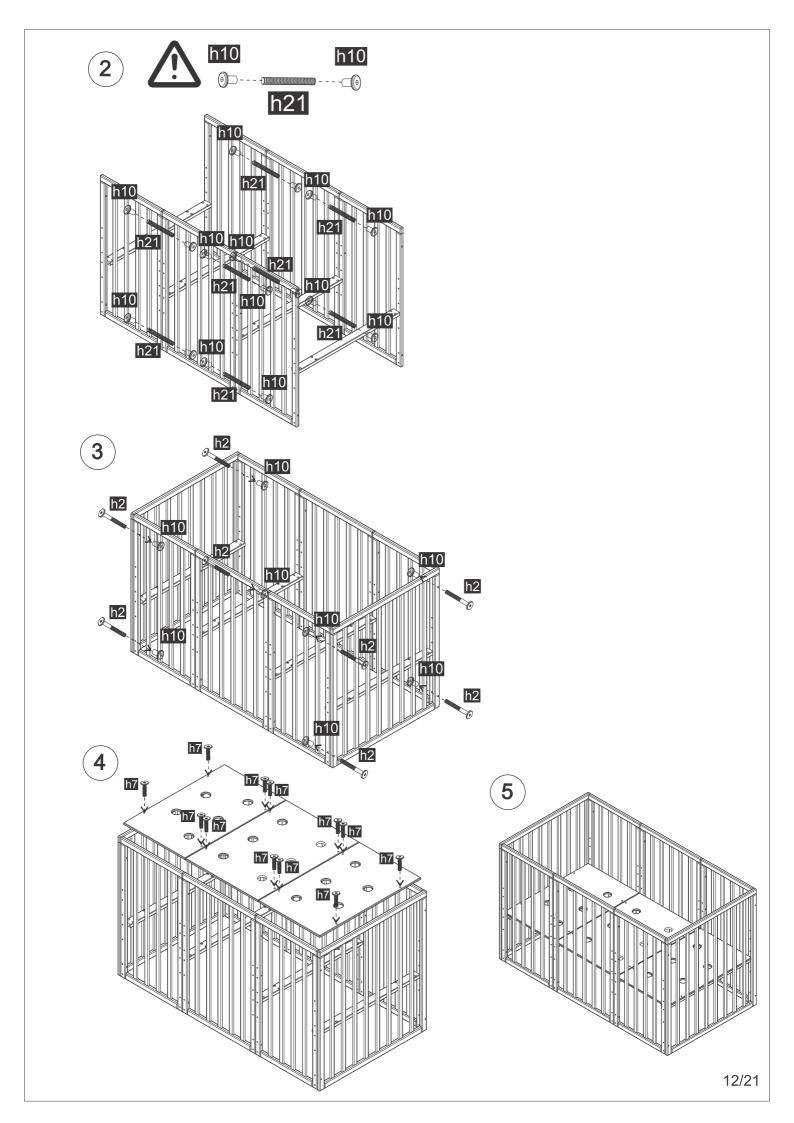




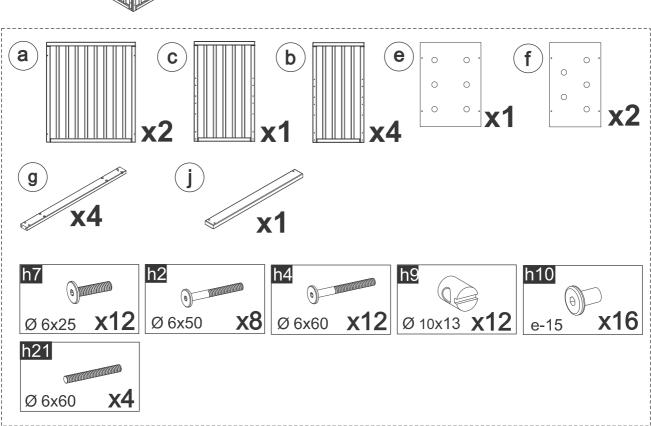


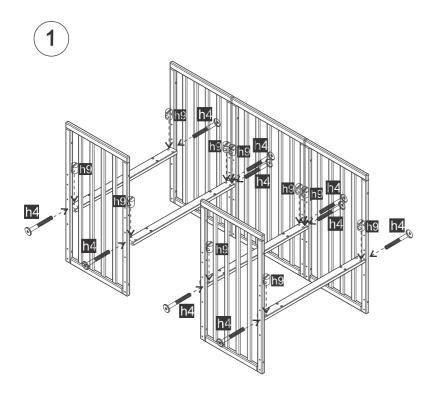


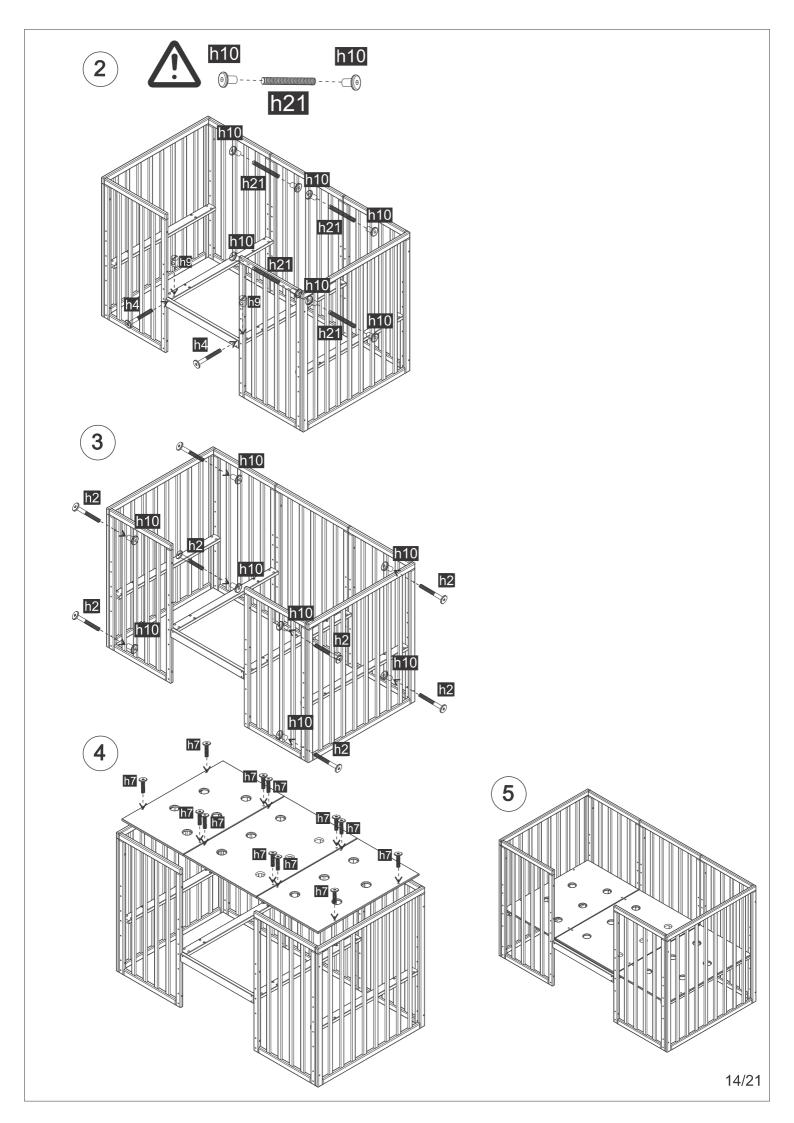





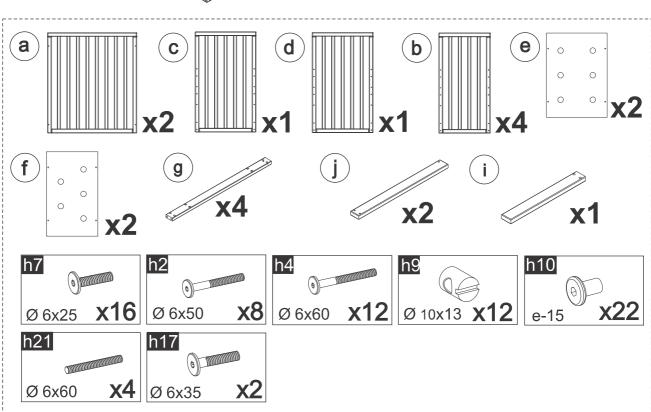

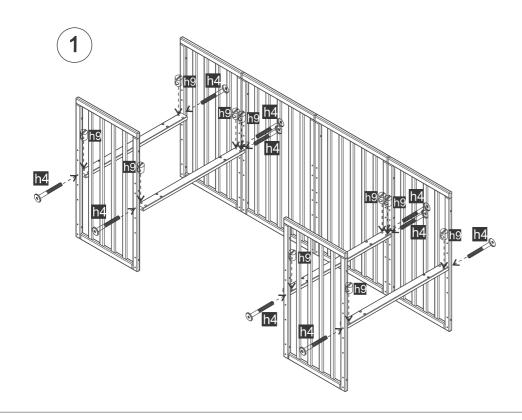

2

